




# Spring clamp miniblocks

- Rated cross section up to 2,5 mm<sup>2</sup>
- Mounting allowed on symmetrical rail (DIN 2 or DIN 3) and snapped on panel or with flanges
- Operating temperature -55° to +110°C
- Without halogen nor cadmium
- With or without ferrule

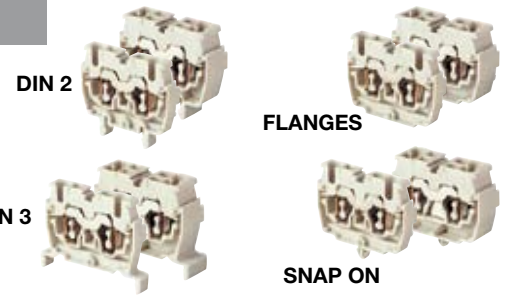

## Feed through terminal blocks

Block	Rated cross section	Spacing	Rated current	Part/number	End section	Jumper bar IP20
DIN 2  DR 2,5/5.2L	2,5 mm <sup>2</sup>	5 mm	24 A	Grey 1SNA 290 201 R1100 Blue 1SNA 290 203 R1300 Orange 1SNA 290 202 R1200	Grey 1SNA 291 301 R0200 Orange 1SNA 291 302 R0300	2 poles 1SNA 291 102 R2300 3 poles 1SNA 291 103 R2400 4 poles 1SNA 291 104 R2500 5 poles 1SNA 291 105 R2600 10 poles 1SNA 291 110 R2600
				Grey 1SNA 290 211 R0200 Blue 1SNA 290 213 R0400 Orange 1SNA 290 212 R0300	Grey 1SNA 291 301 R0200 Orange 1SNA 291 302 R0300	2 poles 1SNA 291 322 R2600 3 poles 1SNA 291 323 R2700 4 poles 1SNA 291 324 R2000 5 poles 1SNA 291 325 R2100
DIN 3  DS 2,5/5.2L	2,5 mm <sup>2</sup>	5 mm	24 A	Grey 1SNA 290 221 R0400 Blue 1SNA 290 223 R0600 Orange 1SNA 290 222 R0500	Grey 1SNA 291 301 R0200 Orange 1SNA 291 302 R0300	2 poles 1SNA 291 102 R2300 3 poles 1SNA 291 103 R2400 4 poles 1SNA 291 104 R2500 5 poles 1SNA 291 105 R2600 10 poles 1SNA 291 110 R2600
				Grey 1SNA 290 231 R0600 Blue 1SNA 290 233 R0000 Orange 1SNA 290 232 R0700	Grey 1SNA 291 301 R0200 Orange 1SNA 291 302 R0300	2 poles 1SNA 291 322 R2600 3 poles 1SNA 291 323 R2700 4 poles 1SNA 291 324 R2000 5 poles 1SNA 291 325 R2100
SNAP ON  DH 2,5/5.2L	2,5 mm <sup>2</sup>	5 mm	24 A	Grey 1SNA 290 261 R1400 Blue 1SNA 290 263 R1600 Orange 1SNA 290 262 R1500	Grey 1SNA 291 301 R0200 Orange 1SNA 291 302 R0300	2 poles 1SNA 291 102 R2300 3 poles 1SNA 291 103 R2400 4 poles 1SNA 291 104 R2500 5 poles 1SNA 291 105 R2600 10 poles 1SNA 291 110 R2600
				Grey 1SNA 290 271 R1600 Blue 1SNA 290 273 R1000 Orange 1SNA 290 272 R1700	Grey 1SNA 291 301 R0200 Orange 1SNA 291 302 R0300	2 poles 1SNA 291 322 R2600 3 poles 1SNA 291 323 R2700 4 poles 1SNA 291 324 R2000 5 poles 1SNA 291 325 R2100
FLANGES  DB 2,5/5.2L	2,5 mm <sup>2</sup>	5 mm	24 A	Grey 1SNA 290 241 R1000 Blue 1SNA 290 243 R1200 Orange 1SNA 290 242 R1100	Grey - Kit* 1SNA 290 281 R0100 Orange - Kit* 1SNA 290 282 R0200	2 poles 1SNA 291 102 R2300 3 poles 1SNA 291 103 R2400 4 poles 1SNA 291 104 R2500 5 poles 1SNA 291 105 R2600 10 poles 1SNA 291 110 R2600
				Grey 1SNA 290 251 R1200 Blue 1SNA 290 253 R1400 Orange 1SNA 290 252 R1300	Grey 1SNA 290 281 R0100 Orange 1SNA 290 282 R0200	2 poles 1SNA 291 322 R2600 3 poles 1SNA 291 323 R2700 4 poles 1SNA 291 324 R2000 5 poles 1SNA 291 325 R2100

\* 2 flanges Right and Left Kit

## Ground terminal blocks

DIN 2

Block	Rated cross section	Spacing	Rated current	Part/number	End section
DIN 2  DR 2,5/10.P.4L	2,5 mm <sup>2</sup>	10 mm	300 A/1s	Green / Yellow 1SNA 290 219 R1200	Grey 1SNA 291 301 Orange 291 302

Detailed technical characteristics : see page