

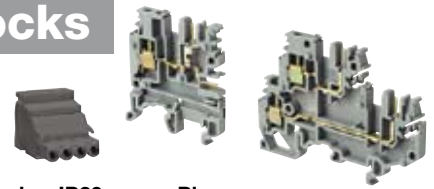




Screw clamp pluggable terminal blocks

Feed through pluggable terminal blocks



| Block | Rated cross section | Spacing | Rated current | Part/number | End section | Jumper bar IP20 | Plug |
|--|---------------------|---------|---------------|-------------------------|-------------------------|---|---|
|  MA 2,5/5 - CPE | 2,5 mm ² | 5,08 mm | 12 A | Grey 1SNA 115 957 R1200 | Grey 1SNA 118 368 R1600 | 2 poles 1SNA 176 278 R1600 3 poles 1SNA 176 279 R1700 4 poles 1SNA 176 280 R0500 5 poles 1SNA 176 281 R2200 10 poles 1SNA 176 282 R2300 | CPFT 2/2 1SNA 094 302 R2100 CPFT 2/3 1SNA 094 303 R2200 CPFT 2/4 1SNA 094 304 R2300 CPFT 2/5 1SNA 094 305 R2400 CPFT 2/8 1SNA 094 308 R0700 CPFT 2/10 1SNA 094 310 R2400 CPFT 2/12 1SNA 094 312 R1200 |
|  MA 2,5/5 - 2CPE | 2,5 mm ² | 5,08 mm | 12 A | Grey 1SNA 115 964 R1100 | Grey 1SNA 215 038 R2000 | 2 poles 1SNA 176 278 R1600 3 poles 1SNA 176 279 R1700 4 poles 1SNA 176 280 R0500 5 poles 1SNA 176 281 R2200 10 poles 1SNA 176 282 R2300 | CPFT 2/2 1SNA 094 302 R2100 CPFT 2/3 1SNA 094 303 R2200 CPFT 2/4 1SNA 094 304 R2300 CPFT 2/5 1SNA 094 305 R2400 CPFT 2/8 1SNA 094 308 R0700 CPFT 2/10 1SNA 094 310 R2400 CPFT 2/12 1SNA 094 312 R1200 |
|  MA 2,5/5D2 - 2CPE | 2,5 mm ² | 5,08 mm | 12 A | Grey 1SNA 115 961 R1600 | Grey 1SNA 215 071 R2100 | 2 poles 1SNA 176 278 R1600 3 poles 1SNA 176 279 R1700 4 poles 1SNA 176 280 R0500 5 poles 1SNA 176 281 R2200 10 poles 1SNA 176 282 R2300 | CPFT 2/2 1SNA 094 302 R2100 CPFT 2/3 1SNA 094 303 R2200 CPFT 2/4 1SNA 094 304 R2300 CPFT 2/5 1SNA 094 305 R2400 CPFT 2/8 1SNA 094 308 R0700 CPFT 2/10 1SNA 094 310 R2400 CPFT 2/12 1SNA 094 312 R1200 |






Screw clamp miniblocks

- Rated cross section up to 4 mm²
- Mounting allowed on symmetrical rail DIN 2
- Operating temperature -55° to +110°C
- Without halogen nor cadmium
- With or without ferrule




Feed through miniblocks

| Block | Rated cross section | Spacing | Rated current | Part/number | End section | Jumper bar IP20 |
|---|---------------------|---------|---------------|-------------------------|-------------------------|--|
|  DR 1,5/4 | 1,5 mm ² | 4 mm | 17,5 A | Grey 1SNA 110 106 R2500 | Grey 1SNA 215 580 R2100 | 2 poles 1SNA 205 735 R0600* 3 poles 1SNA 205 736 R0700* 5 poles 1SNA 205 737 R0000* 10 poles 1SNA 205 738 R1100* |
|  DR 1,5/5.1 | 1,5 mm ² | 5 mm | 20 A | Grey 1SNA 112 086 R0200 | Grey 1SNA 117 318 R2300 | 2 poles 1SNA 176 704 R0200 3 poles 1SNA 176 705 R0300 4 poles 1SNA 176 706 R0400 5 poles 1SNA 176 707 R0500 10 poles 1SNA 176 708 R1600 |
|  DR 4/6.1 | 4 mm ² | 6 mm | 32 A | Grey 1SNA 110 491 R1700 | Grey 1SNA 117 600 R0300 | 2 poles 1SNA 173 217 R2600* 3 poles 1SNA 173 218 R0700* 4 poles 1SNA 173 219 R0000* 5 poles 1SNA 173 221 R2200* 10 poles 1SNA 173 226 R2700* |

* Not IP20

Protection miniblocks

| Block | Rated wire size | Spacing | Rated current | Part/number | End section |
|---|-------------------|---------|---------------|-----------------------------------|---------------------------|
|  DR 4/6.P | 4 mm ² | 6 mm | 480 A/1s | Green / Yellow 1SNA 160 496 R2600 | Yellow 1SNA 103 975 R2100 |



Detailed technical characteristics : see page 28.

Other colors, accessories, informations : ask for the specific catalogue to your ABB Entelec agency.